


Installed with upgraded LBP compressor, this series blends outstanding performance and ease of use to quickly chill products to the required temperature.



Product Feature:

- Casters
- Lock and key
- Inner liner of hammered aluminum
- Knob controller with temperature display
- Static cooling system
- Internal water drainer
- Upgraded compressor capacity
- CFC free refrigerant

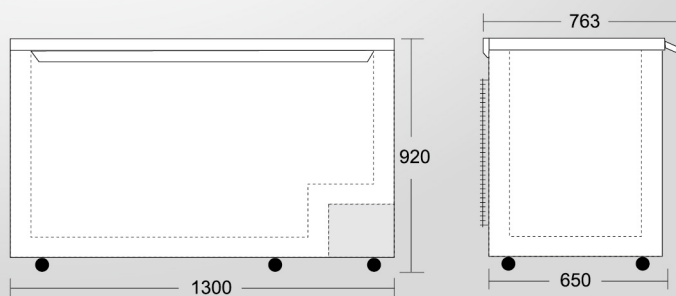

UNIT : m/m

Model	Volume(L)	Temperature	Dimension (WxDxH)m/m	Horse Power(HP)	CFC Free Refrigerant	Power Supply
RS-CF250LT	207	-40~ -45°C	750 x 650 x 920	5/8	R404A	220V 50 / 60Hz
RS-CF330LT	301	-40~ -45°C	1000 x 650 x 920	3/4	R404A	220V 50 / 60Hz
RS-CF430LT	414	-40~ -45°C	1300 x 650 x 920	3/4	R404A	220V 50 / 60Hz
RS-CF500LT	489	-40~ -45°C	1500 x 650 x 920	3/4	R404A	220V 50 / 60Hz
RS-CF600LT	602	-40~ -45°C	1800 x 650 x 920	3/4	R404A	220V 50 / 60Hz

LT-100<-100S Type




Installed with upgraded LBP compressor and enhanced insulator, this top of the range series is made to satisfy extreme storage temperature requirements.



Product Feature:

- Casters
- Lock and key
- Inner liner of hammered aluminum
- Knob controller with temperature display
- Static cooling system
- Internal water drainer
- Upgraded compressor capacity
- 100mm thick polyurethane foam insulation
- CFC free refrigerant

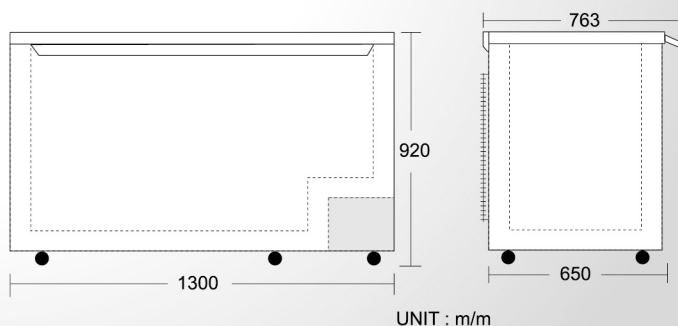

Model	Volume(L)	Temperature	Dimension (WxDxH)m/m	Horse Power(HP)	CFC Free Refrigerant	Power Supply
RS-CF250LT-100	136	-45~ -50°C	750 x 650 x 920	3/5	R404A	220V 50 / 60Hz
RS-CF330LT-100	227	-45~ -50°C	1000 x 650 x 920	3/5	R404A	220V 50 / 60Hz
RS-CF430LT-100	320	-45~ -50°C	1300 x 650 x 920	5/6	R404A	220V 50 / 60Hz
RS-CF500LT-100	380	-45~ -50°C	1500 x 650 x 920	5/6	R404A	220V 50 / 60Hz
RS-CF600LT-100	485	-45~ -50°C	1800 x 650 x 920	1	R404A	220V 50 / 60Hz
RS-CF250LT-100S	136	-55~ -60°C	750 x 650 x 920	3/5	R404A	220V 50 / 60Hz
RS-CF330LT-100S	227	-55~ -60°C	1000 x 650 x 920	3/5	R404A	220V 50 / 60Hz
RS-CF430LT-100S	320	-55~ -60°C	1300 x 650 x 920	5/6	R404A	220V 50 / 60Hz
RS-CF500LT-100S	380	-55~ -60°C	1500 x 650 x 920	5/6	R404A	220V 50 / 60Hz
RS-CF600LT-100S	485	-55~ -60°C	1800 x 650 x 920	1	R404A	220V 50 / 60Hz